





WALL MOUNT SPEAKER TCI-610W

**Dimension:**

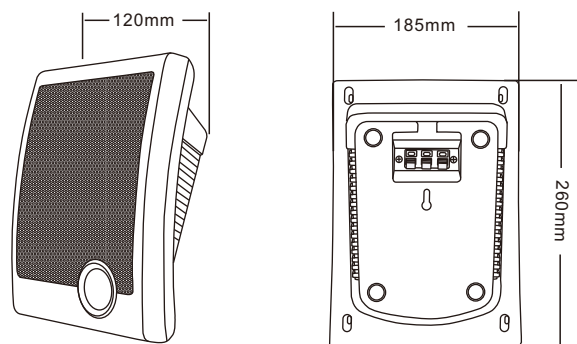


**Installation Steps:**


① Drill an eyelet



② Fix a screw



③ Connect wiring  
and fix the speaker

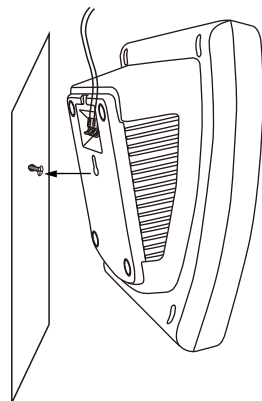

**Wall Mount Speaker**



**TCI-610W**

***User's Manual***

### Dear customers:

Your use of the TCI speaker series, we would like to extend my heartfelt thanks to you, the commitment to keep its quality.

Our speakers are widely used for hotels, commercial buildings, supermarkets, schools, leisure and entertainment venues, is your ideal choice.

For your installation, commissioning and use of this product, the installation please read this note.

### Safety Tips

- Please be sure to use the former reading detailed notes.
- Really pay attention to this manual and a safety with the important warning.
- Recommend that you keep this manual for future reference.

### Common warning signs and security

The manual shown warning signs and security is to prevent the improper operation due to personal injury arising from the loss of property, please read before using this product must understand that this manual security symbols and Warning to indicate fully aware of potential risks.



### Warning

Such as the inappropriate use of staff will cause injury, death and property damage.

### When installed loudspeakers

- Definitely will not be allowed to speakers and any exposure in the rain-wet or water, may be inconsistent with , or fire.
- Restricted by the provisions of the speakers on the voltage, such as the us of high voltage may cause electric shock or fire disaster. Is no pruning, distorted, or replacement of damaged wires.
- Avoid instability in the installation or set up speakers, such as shaking the table or flat surface , the speaker can avoid falling caused personal injury or property damage.
- Speakers will be installed in support of the speaker or the weight of a solid shelf. Speaker swap can be avoided caused personal injury or property damage.
- Wet hands must not be admitted into or plugs, may lead to electric shocks.
- The allocation of plugs, make sure that pull plugs, rather than pull wires.  
The use of a damaged power line of machinery may cause fire or electric shock.
- Mobile speaker, you plug the prior allocated. If the speaker and plugs may be moving together will cause fire or electric shock. For plugs, identified as plugs for grip.
- Will not be allowed to speakers on the vent cover, may cause internal heating caused by the fire.
- Avoid speakers installed in the humidity or dust, direct contact with the sun from the near-electric, or smoke or steam, may cause fire or electric shock

### Features:

- ※ Attractive color ABS resin finish with metal grille & attractive curved shape suits any decor.
- ※ Built-in 100V transformer.
- ※ Two power taps 5W & 10W.
- ※ Easy and secure wall mount through the mounting hook.

### Specifications:

Model	TCI-610W
Rated Power	10W
Input	100V
Frequency Response	150Hz-17KHz
Sensitivity(1w,1n)	92 ±3 Db
Dimension	260*185*120mm
Finished	White
Material	ABS
Speaker Driver	6.5"×1
Net Weight	1.3kg
Gross Weight	1.5kg