



Outdoor Column Speaker User manual

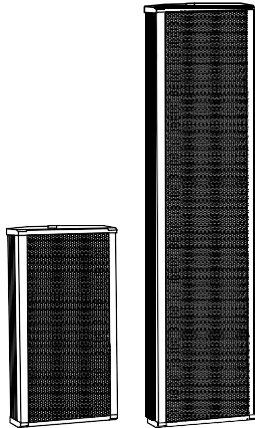


Exterior Design:

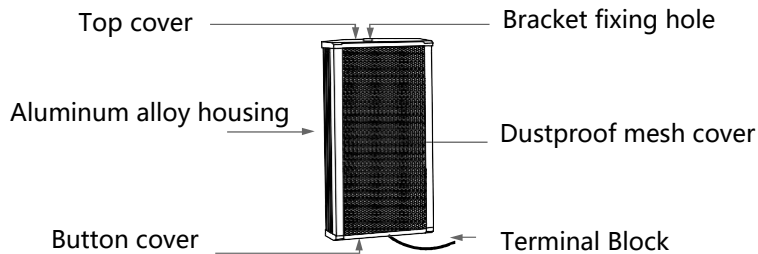


Specification:

- Aluminum alloy housing
- Weatherproof and moisture-resistant
- 6" full-range driver
- Painted aluminum mesh


Installation steps:

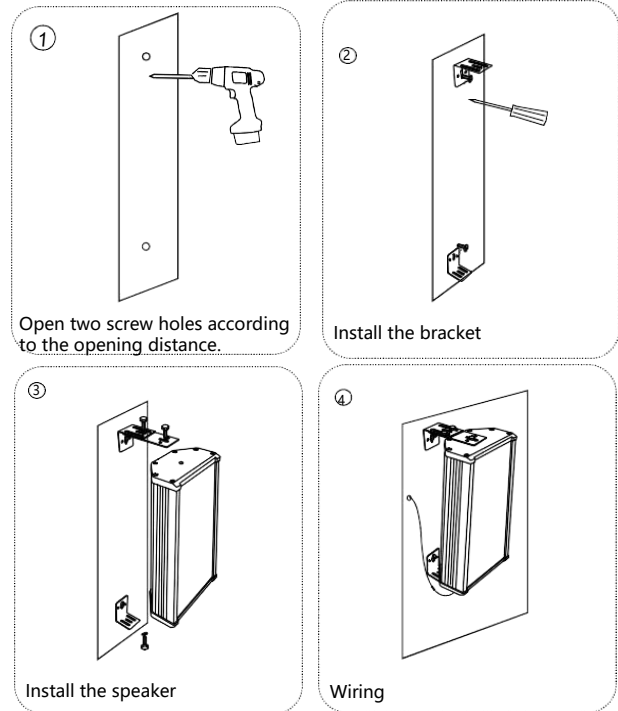

Holing distance

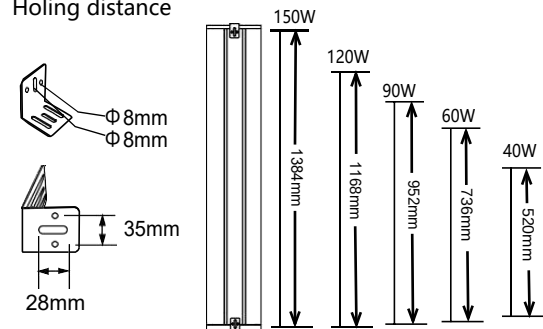

Wiring method:

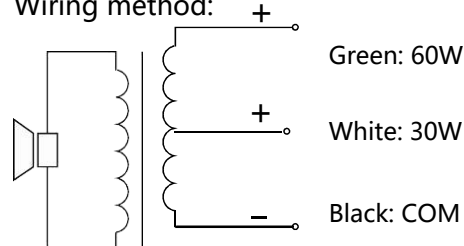

Here, according to the selected power, only two wires can be connected. And the Com line "ground wire" must be connected

Technical paramters:

Rated power:	20W/40W	30W/60W	45W/90W	60W/120W	75W/150W
Input voltage:	70V/100V	70V/100V	70V/100V	70V/100V	70V/100V
Sensitivity(1m/1W):	96±3 dB	98±3 dB	102±3 dB	105±3 dB	110±3 dB
Frenquency response:	100-20KHZ	100Hz-20KHZ	100Hz-20KHZ	100Hz-20KHZ	100Hz-20KHZ
Dimension(mm):	520*230*120	736*230*120	952*230*120	1168*230*120	1384*230*120
Installation:	Wall mounted	Wall mounted	Wall mounted	Wall mounted	Wall mounted
Material:	Metal	Metal	Metal	Metal	Metal
Weight(Kg):	4.6KG	6.8kg	8.6	10.5	12.5
Speaker units:	6"*1+ tweeter*1	6"*2+ tweeter*2	6"*4+ tweeter*2	6"*5+ tweeter*4	6"*6+ tweeter*2