




## Features

- Exceptional voice and music reproduction effects
- Lower maintenance costs
- Waterproof and dustproof rating meets IP66
- standard Compliant with CE standards

## Specification


Model	TCI-516W
Rated Power	20W
Power Selection	5W/10W/20W
Rated Impedance	2K $\Omega$ /1K $\Omega$ /500 $\Omega$
Sound Pressure Level	92 $\pm$ 3dB
Frequency Response	110HZ-15KHZ
Product Color	White RAL 9016
Material	ABS
Dimensions	$\Phi$ 170*248mm
Weight	1.66Kg/1PCS
Dimensions	640*430*355mm
Operating Temperature	-25°C to +55°C
Storage Temperature	-40°C to +70°C
Relative Humidity	$\leq$ 95%

## Three Views




Dimensions (Unit: mm)


## Circuit Diagram

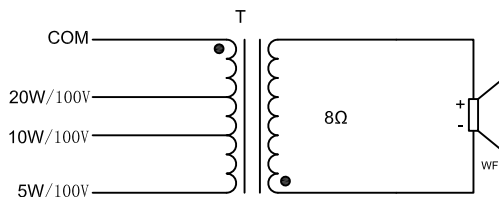

## Frequency Response

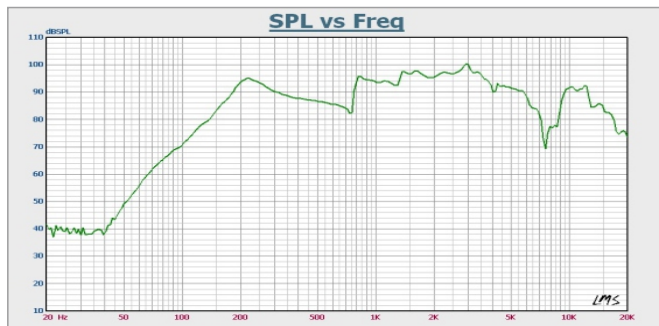

## Impedance

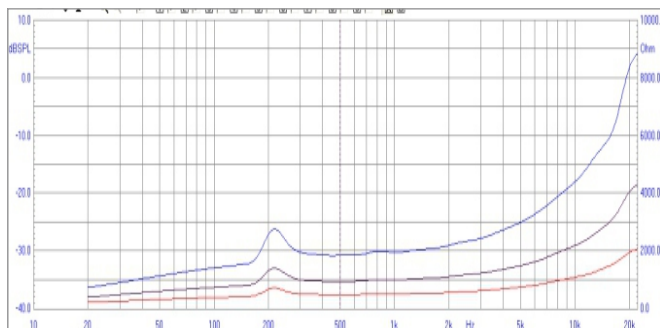

## Installation

1. Secure a hook to the ceiling.



2. Tie a slipknot at the end of the exposed lead and loop it over the hook.

