


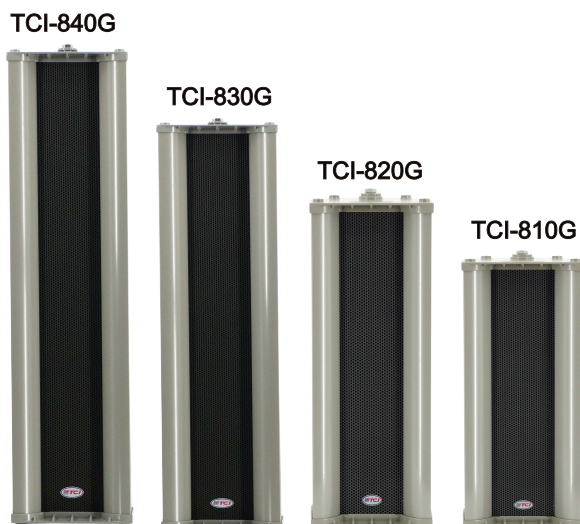

Features:

1. Extraordinary voice and music reproduction effects Aluminum alloy shell
2. Water and corrosion resistance
3. CE standard
4. IP66 level

Specification

Model	TCI-810G	TCI-820G	TCI-830G	TCI-840G
Input Power	5W/10W(100V)	10W/20W(100V)	15W/30W(100V)	20W/40W(100V)
Rated Impedance	2K Ω (5W)/1K Ω (10W)	1K Ω (10W)/500 Ω (20W)	667 Ω (15W)/333 Ω (30W)	500 Ω (20W)/250 Ω (40W)
Sensitivity	88 $\pm$ 3dB(1M/1W)	89 $\pm$ 3dB(1M/1W)	90 $\pm$ 3dB(1M/1W)	91 $\pm$ 3dB(1M/1W)
Frequency Response	100Hz-20KHz			
Speaker Unit	4" Full Range Speaker			
Mounting Hole Size	2" Φ 10MM The height of the hole to hole is 207mm	2" Φ 10MM The height of the hole to hole is 318mm	2" Φ 10MM The height of the hole to hole is 440mm	2" Φ 10MM The height of the hole to hole is 545mm
Speaker Installation Method	Wall mounted			
Connection Mode	Three core cable			
Material Science	Panel, mesh cover : aluminum			
Size	258*151*125	378*151*125	498*151*125	618*151*125
Weight	2.24Kg/1PC	3.04Kg/1PC	4.04Kg/1PC	4.92Kg/1PC
Working Temperature	-25 $^{\circ}$ C to +55 $^{\circ}$ C			
Storage Temperature	-40 $^{\circ}$ C to +70 $^{\circ}$ C			
Relative Humidity	$\leq$ 95%			